



DELTA



Product



DT10031CP - Delta Thermostatic Single Outlet Bar Shower with Flexible Slide Rail Kit & 5 Function Handset

Technical Specification

Max Inlet Pressure (static):	5 Bar
Min Inlet Pressure (dynamic):	0.2 Bar
Max Inlet Temperature:	60°C
Inlet Connections:	3/4" BSP
Outlet Connection:	G1/2"
Temperature Stability:	+/-2°C
Max Pressure Differential:	5:1

Min temperature differential between hot inlet and mixed outlet to achieve cold water failsafe:

5°C

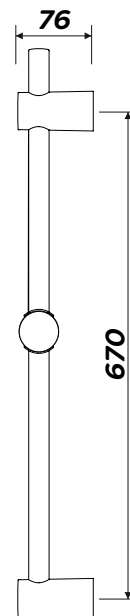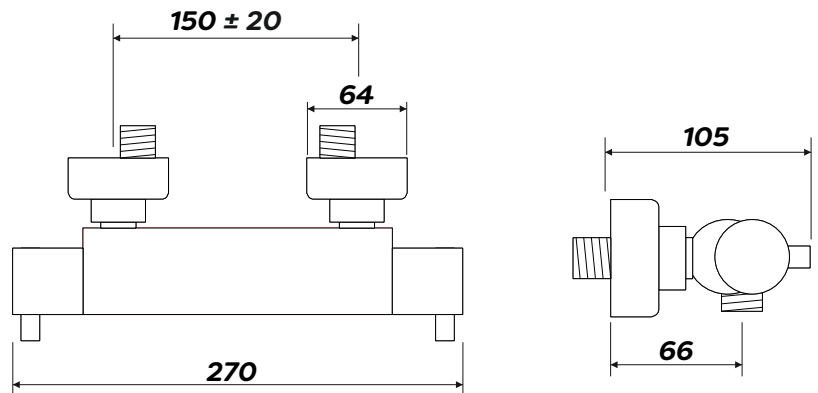

Additional Information

Specifically designed for heat networks where the maximum distribution temperature is 50°C from the HIU

A 5°ΔT between the hot inlet and mixed outlet ensures the valve will still achieve cold water failsafe even with lower inlet temperatures

Minimalistic body with easy to operate metal peg lever handles

Push button, 5 function handset

Thermostatic control

Anti-scald fail safe technology

Slide rail kit with adjustable fixing points

Integral check valves & strainers

Large bore anti-twist hose