



**DELTA**



## **Product**



**DT10035CP - Delta Thermostatic Single Outlet Bar Shower with Flexible Slide Rail Kit, Smooth Hose & Push Button Handset**

## **Technical Specification**

<b>Max Inlet Pressure (static):</b>	<b>5 Bar</b>
<b>Min Inlet Pressure (dynamic):</b>	<b>0.2 Bar</b>
<b>Max Inlet Temperature:</b>	<b>60°C</b>
<b>Inlet Connections:</b>	<b>3/4" BSP</b>
<b>Outlet Connection:</b>	<b>G1/2"</b>
<b>Temperature Stability:</b>	<b>+/-2°C</b>
<b>Max Pressure Differential:</b>	<b>5:1</b>

**Min temperature differential between hot inlet and mixed outlet to achieve cold water failsafe:**

**5°C**

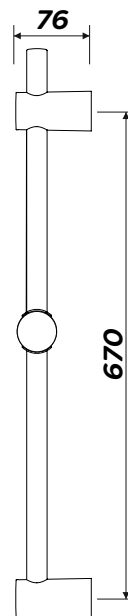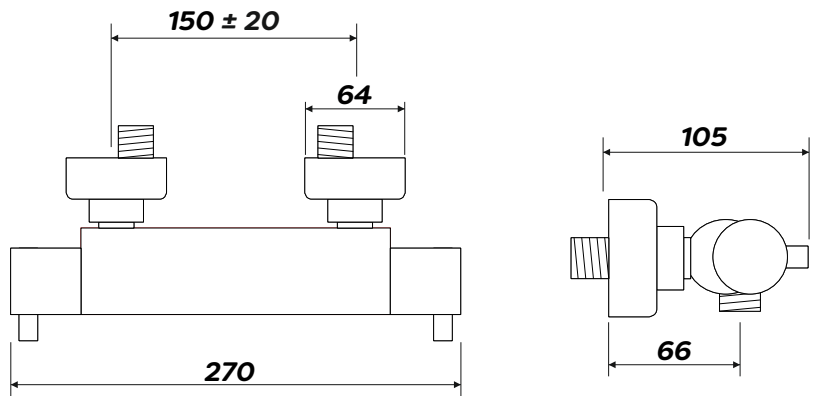

## **Additional Information**

**Specifically designed for heat networks where the maximum distribution temperature is 50°C from the HIU**

**A 5°ΔT between the hot inlet and mixed outlet ensures the valve will still achieve cold water failsafe even with lower inlet temperatures**

**Minimalistic body with easy to operate metal peg lever handles**

**Push button, 5 function handset**

**Thermostatic control**

**Anti-scald fail safe technology**

**Slide rail kit with adjustable fixing points**

**Integral check valves & strainers**

**Large bore anti-twist hose**