## DELTA



## Additional Information

Specifically designed for heat networks where the maximum distribution temperature is 50°C from the HIU

A 5° $\Delta$ T between the hot inlet and mixed outlet ensures the valve will still achieve cold water failsafe even with lower inlet temperatures

Thermostatic control

Anti-scald fail safe technology

Adjustable telescopic riser


Fast fix brackets for quick installation

Integral check valves & strainers

## <u>Product</u>

DT20020CP - Delta Dual Outlet Thermostatic Shower with Telescopic Riser, Overhead Soaker & Multi-Function Handset

Technical Specification	
Max Inlet Pressure (static):	5 Bar
Min Inlet Pressure (dynamic):	0.5 Bar
Max Inlet Temperature:	85°C
Inlet Connections:	15mm Fast Fix
Outlet Connections:	G1/2"
Temperature Stability:	+/-2°C
Max Pressure Differential:	5:1
Min temperature differential between hot inlet and mixed outlet to achieve cold water failsafe:	5°C

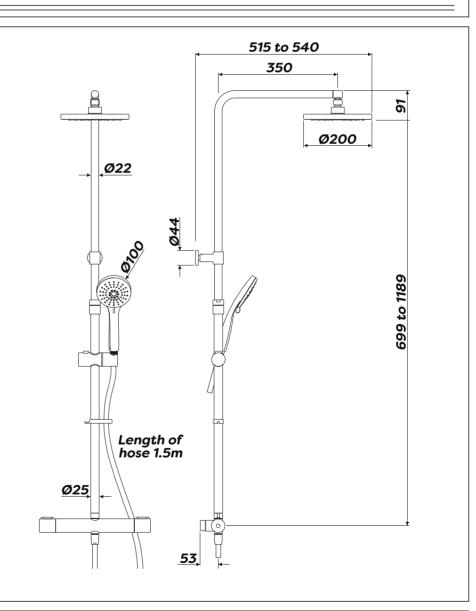

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 OPF T. 01889 272180 F. 01889 272181 E. <u>sales@intatec.co.uk</u> www.intatec.co.uk