



Product

ST10010CP - Acura Safe Touch Thermostatic Bar Shower

Technical Specification

Max Inlet Pressure (static):	5 Bar
Min Inlet Pressure (dynamic):	0.2 Bar
Max Inlet Temperature:	85°C
Factory Pre-set Temperature:	41°C with max temp stop
Temperature Stability:	+/-2°C
Inlet Connections:	G1/2"
Outlet Connections:	G1/2" BSP (Bottom)
Min temperature differential between hot inlet and mixed outlet to achieve cold water failsafe:	10°C
Max Inlet Pressure Ratio:	5:1



Additional Information



Peg handles to aid users with limited dexterity

Safe touch shower body

Independent control of temperature and flow

Thermostatic control with anti-scald cold water fail-safe technology

WRAS & TMV3 Approved (HP only)

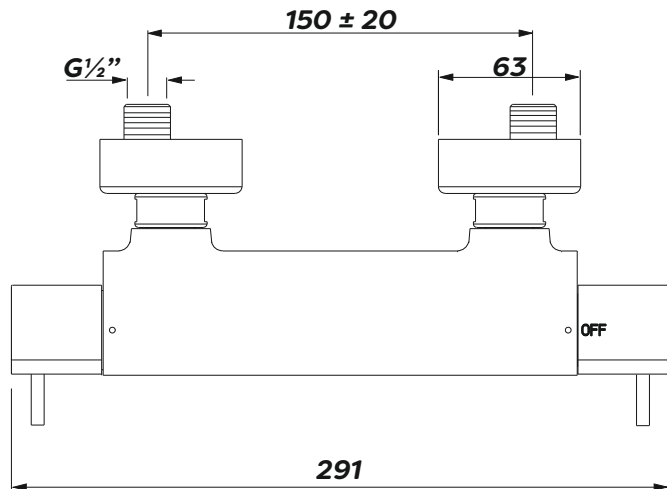

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF

T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk

www.intatec.co.uk