

### inta TRADE-TEC

Intatec's Trade-Tec collection has been specifically designed and engineered to meet the exacting requirements of the professional installer, offering quick, easy fit and forget solutions that are stylish, affordable, reliable, compliant and more importantly each shower valve has Intatec's proven Anti-scald thermostatic fail safe protection built-in, delivering exceptional performance and safety that your customers will enjoy.

Intatec's Trade-Tec collection offers the highest standards of performance, reliability and service. Our showering product range is guaranteed for five years and Plumbing and Heating range for two years from the date of purchase\* when fitted in accordance with installation instructions and best working practice (including local water bylaws).

Intatec Limited has been assessed by BMTRADA and has been granted approval under the terms of the scheme for Quality Management Systems to ISO 9001:2015, ISO 14001:2015 and OHSAS 18001.



#### **INSTALLER DESIGN FEATURES**



#### **APPROVALS KEY**



The surface temperature of these products does not get hot during normal use.



The blue anti-scald hand is your assurance that the shower will deliver safe hot water. This means that you can have hot water but the thermostatic cartridge will not allow the water to get hot enough to scald.



Valves have been accredited TMV2 approval from NSF certification where you see this logo.



Products with this logo are WRAS Approved and have undergone mechanical and water quality testing to comply with the Water Fittings Regulations.

#### TRADE - TEC BAR SHOWER

Thermostatic bar shower with flexible slide rail kit and fast fix brackets

#### TR10032CP

#### **FEATURES**

Thermostatic control Anti-scald technology WRAS approved (valve only) Fast fix brackets Adjustable fixing points for riser Double cross-linked hose Single function handset Universal fitting



#### **ORDER QUANTITY**

Please Note: This shower is supplied in box quantities of 4 only.





E&0E



#### TRADE-TEC OPTIMO DUAL OUTLET

Thermostatic bar shower with telescopic riser and fast fix brackets

#### TR20020CP

#### **FEATURES**

Thermostatic control Anti-scald technology WRAS approved (valve only) TMV2 approved (valve only) Fast fix brackets Fully adjustable riser Double cross-linked hose Multi-function handset Universal fitting



#### **ORDER QUANTITY**

Please Note: This shower is supplied in box quantities of 3 only.



#### TRADE-TEC OPTIMO-COOL

Thermostatic bar shower with flexible slide rail kit, multi-function handset and fast fix brackets

TR20017CP

#### **FEATURES**

Thermostatic control Anti-scald technology Safe-touch body WRAS approved TMV2 approved (valve only) Fast fix brackets Adjustable fixing points for riser Double cross-linked hose Multi-function handset



#### **ORDER QUANTITY**

Please Note: This shower is supplied in box quantities of 4 only.





E&OE

#### TRADE - TEC **OPTIMO-COOL DUAL OUTLET**

Thermostatic bar shower with telescopic riser and fast fix brackets

#### TR20025CP

#### **FEATURES**

Thermostatic control Anti-scald technology Safe-touch body WRAS approved (valve only) TMV2 approved (valve only) Fast fix brackets Fully adjustable riser Smooth hose Push button multi-function handset 250mmØ Stainless steel soaker





#### **ORDER QUANTITY**

Please Note: This shower is supplied in box quantities of 2 only.



E&0E

07

#### TRADE - TEC CONCEALED

Thermostatic concealed shower with flexible riser kit

#### TR40014CP

#### **FEATURES**

Thermostatic control Anti-scald technology WRAS approved (valve only) Adjustable fixing points for riser Double cross-linked hose Single function handset 15mm direct connection valve







#### TRADE - TEC BATH SHOWER MIXER

Thermostatic bath shower mixer with deck mounting legs and flexible riser kit

TR30024CP


#### **FEATURES**

Thermostatic control Anti-scald technology WRAS approved (valve only) TMV2 approved (valve only) Deck mounting legs Adjustable fixing points for riser





### TRADE-TEC BAR SHOWER

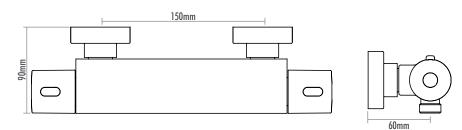

#### **TECHNICAL INFORMATION**

Minimum temperature differential between hot inlet and

Minimum operating pressure: 0.2bar (dynamic)

Inlet connections: Fast fix 15mm compression

mixed outlet to achieve cold water fail safe: 15°C

Maximum operating pressure: 5 bar

Thermostatic cartridge: ST20004XX


Flow cartridge: TR00004XX




#### **ORDER QUANTITY**

Please Note: This shower is supplied in box quantities of 4 only.





#### **TRADE TEC OPTIMO DUAL OUTLET** TR20020CP

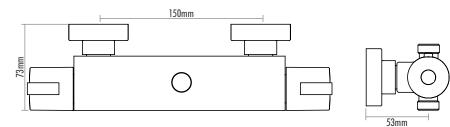

#### TECHNICAL INFORMATION


Minimum operating pressure: 0.5 bar (dynamic) Maximum operating pressure: 5 bar Inlet connections: Fast fix 15mm compression Minimum temperature differential between hot inlet and mixed outlet to achieve cold water fail safe: 15°C Thermostatic cartridge: TR20003XX Flow cartridge: TR20004XX




#### ORDER QUANTITY

Please Note: This shower is supplied in box quantities of 3 only.



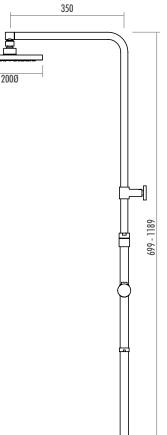

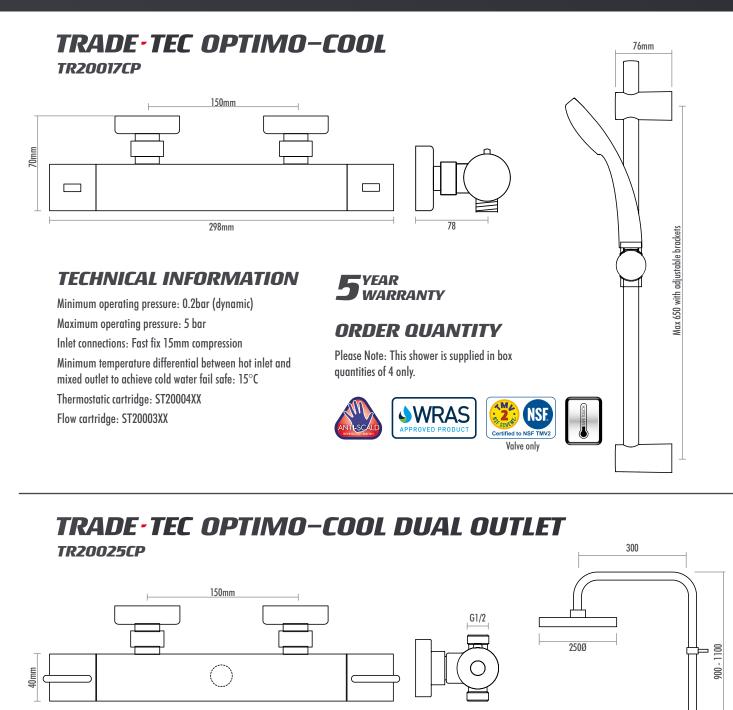

#### TECHNICAL INFORMATION

309mm

Minimum operating pressure: 0.4 bar (dynamic) Maximum operating pressure: 5 bar Inlet connections: Fast fix 15mm compression Minimum temperature differential between hot inlet and mixed outlet to achieve cold water fail safe: 15°C Thermostatic cartridge: ED300006XX Flow cartridge: CB0003 **5**<sup>YEAR</sup> WARRANTY


#### **ORDER QUANTITY**


Please Note: This shower is supplied in box quantities of 2 only.



G1/2

### TRADE - TEC CONCEALED






#### TECHNICAL INFORMATION

Minimum operating pressure: 0.2bar (dynamic) Maximum operating pressure: 5 bar Inlet connections: 15mm compression Minimum temperature differential between hot inlet and mixed outlet to achieve cold water fail safe: 15°C Thermostatic cartridge: SP00001XX Flow cartridge: SP00002XX







#### TRADE-TEC BATH SHOWER MIXER 66mm TR30024CP 180mm 35mm G½″ **G**<sup>3</sup>⁄<sub>4</sub> 143mm 692mm 270mm **TECHNICAL INFORMATION** YEAR WARRANTY Minimum operating pressure: 0.2bar (dynamic) Maximum operating pressure: 5 bar WRAS Inlet connections: G3/4" deck mounted legs NS fied to NSF TMV2 Minimum temperature differential between hot inlet and Valve only Valve only mixed outlet to achieve cold water fail safe: 15°C Thermostatic cartridge: 10017

Flow cartridge: VT01V1

# 

### Only available from inta






## Whole house protection!



- No electricity, chemicals, magnets, earth bonding or maintenance.
- Quality stainless steel housing.
- 15 year manufacturer's warranty.

### Taking charge of your limescale







Scan here to see our full range

## no other supplier offers such a comprehensive range of products as we do



### We've got the complete range

Get your free copy of our latest brochures by calling 01889 272180 or visit WWW.INTATEC.CO.UK



SCAN THE CODE ABOVE OR VISIT WWW.INTATEC.CO.UK FOR ON THE SPOT HELP WITH:

- Problem Solving
- Frequently Asked Questions
- Product Information
- Product Updates
- Product Warranty Registration



#### GENERAL INFORMATION

OFFICE HOURS	Monday to Friday 8.30am to 5.00pm.
TERMS	A copy of Intatec's terms and conditions is available on the website www.intatec.co.uk or by request.
PROPERTY OF GOODS	Until full payment is received, all goods supplied remain the property of Intatec Limited.
ORDERING	Carriage paid if order value over £100. Small order charge of £7.50 applied to all orders under £100. Products are supplied in box quantities and multiples thereof only where noted.
DELIVERY	Carriage Paid 1-3 day service, UK mainland only. Please enquire at time of ordering.
WARRANTY	Intatec's Trade-Tec collection offers the highest standards of performance, reliability and service. Our showering product range is guaranteed for 5 years and Plumbing and Heating range for 2 years from the date of purchase* when fitted in accordance with installation instructions and best working practice (including local water bylaws). All warranty claims are subject to product inspection and are limited to product repair or replacement only.
	For a full copy of Intatec terms and conditions please refer to our website www.intatec.co.uk
	* Replacement products or replacement parts are available

\* Replacement products or replacement parts are available in the unlikely event of a manufacturing fault occurring. Liability does not cover consequential loss or damage.

#### Inta's guide to Thermostatic Protection




'Up to 5 children are scalded in the UK everyday!' Find out more by downloading our free booklet on thermostatic protection at:

intatec.co.uk



Scan the code to view online

#### **15MM TRADE TEC PRESSURE REDUCING VALVE** PRVG15

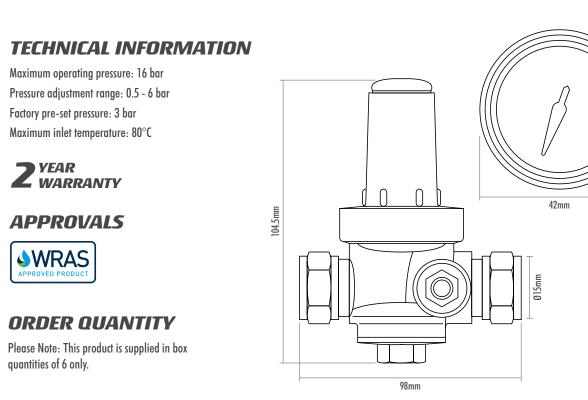

#### **22MM TRADE TEC PRESSURE REDUCING VALVE** PRVG22

#### **TECHNICAL INFORMATION**

Maximum operating pressure: 16 bar Pressure adjustment range: 0.5 - 6 bar Factory pre-set pressure: 3 bar Maximum inlet temperature: 80°C








#### **ORDER QUANTITY**

Please Note: This product is supplied in box quantities of 6 only.

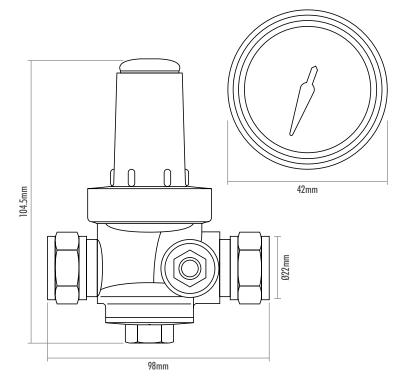



### TRADE-TEC AUTOMATIC AIR VENT


#### **TECHNICAL INFORMATION**

Maximum operating pressure: 6 bar Connection: ½" Maximum inlet temperature: 110°C



#### **ORDER QUANTITY**

Please Note: This product is supplied in box quantities of 10 only.



#### **TRADE-TEC MAGNETIC SYSTEM FILTER** TRMAGFIL22 / TRMAGFIL28


#### **TECHNICAL INFORMATION**

Maximum operating pressure: 4 bar Maximum working temperature: 90°C Inlet connection: 22mm / 28mm compression



#### **ORDER QUANTITY**

Please Note: TRMAGFIL22 and TRMAGFIL28 are supplied in box quantities of 2 only

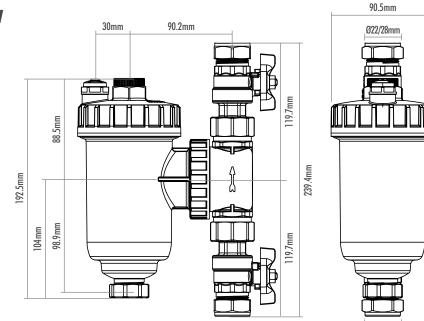

E&OE

Ø22/28mm

#### **IOMM TRADE-TEC MANUAL RADIATOR VALVE** MRV10


#### TECHNICAL INFORMATION

Maximum operating pressure: 10 bar Maximum temperature: 100°C



#### ORDER QUANTITY

Please Note: This product is supplied in box quantities of 20 only.



### 15MM TRADE-TEC MANUAL RADIATOR VALVE

MRV15 / MRV15CP


#### TECHNICAL INFORMATION

Maximum operating pressure: 10 bar Maximum temperature: 100°C



#### **ORDER QUANTITY**

Please Note: MRV15 is supplied in box quantities of 50 only and MRV15CP is supplied in box quantities of 20 only.



### 15MM TRADE-TEC STRAIGHT MANUAL RADIATOR VALVE

MRV15STR / MRV15STRCP


#### TECHNICAL INFORMATION

Maximum operating pressure: 10 bar Maximum temperature: 100°C



#### ORDER QUANTITY

Please Note: These products are supplied in box quantities of 20 only.

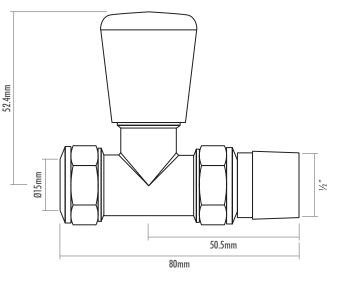

#### *IOMM TRADE • TEC MANUAL RADIATOR VALVE WITH DRAIN OFF*

MRV10D0


#### **TECHNICAL INFORMATION**

Maximum operating pressure: 10 bar Maximum temperature: 100°C



#### **ORDER QUANTITY**

Please Note: This product is supplied in box quantities of 20 only.

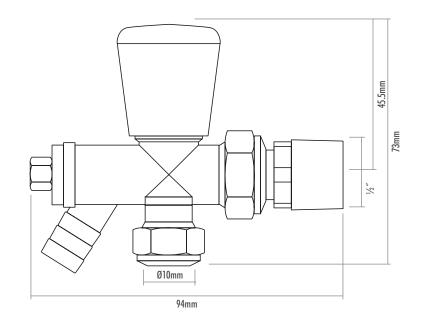

#### 15MM TRADE-TEC MANUAL RADIATOR VALVE WITH DRAIN OFF

MRV15D0


#### **TECHNICAL INFORMATION**

Maximum operating pressure: 10 bar Maximum temperature: 100°C



#### **ORDER QUANTITY**

Please Note: This product is supplied in box quantities of 20 only.

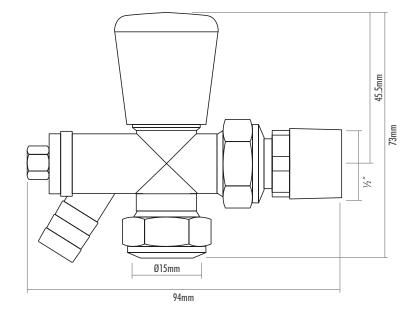

E&OE

#### TRADE-TEC AUTOMATIC AIR VENT & PRESSURE REDUCING VALVES



Automatic air vent 1/2" with check valve

#### AAV007

Please Note: This product is supplied in box quantities of 10 only.





15mm Pressure reducing valve with gauge

#### PRVG15

Please Note: This product is supplied in box quantities of 6 only.



E&OE



22mm Pressure reducing valve with gauge. Also suitable for 15mm pipe

**PRVG22** Please Note: This product is supplied in box quantities of 6 only.





#### TRADE-TEC MAGNETIC SYSTEM FILTER



22mm Trade-Tec magnetic filter

TRMAGFIL22 Please Note: This product is supplied in box quantities of 2 only.



28mm Trade-Tec magnetic filter

#### TRMAGFIL28

Please Note: This product is supplied in box quantities of 2 only.



05

E&0E



Intatec's Trade-Tec collection of plumbing and heating products has been specifically designed and engineered to meet the exacting requirements of the professional installer, offering quick, easy fit and forget solutions that are affordable, reliable and compliant.

Intatec's Trade-Tec collection offers the highest standards of performance, reliability and service. Our showering product range is guaranteed for five years and Plumbing and Heating range for two years from the date of purchase\* when fitted in accordance with installation instructions and best working practice (including local water bylaws).

Intatec Limited has been assessed by BMTRADA and has been granted approval under the terms of the scheme for Quality Management Systems to ISO 9001:2015, ISO 14001:2015 and OHSAS 18001.



\*Replacement products or replacement parts are available in the unlikely event of a manufacturing fault occurring. Liability does not cover consequential loss or damage.

#### PLUMBING & HEATING RANGE FEATURES







#### TRADE-TEC MANUAL RADIATOR VALVES



15mm Angled manual radiator valve

MRV15 Please Note: This product is supplied in box quantities of 50 only.





10mm Angled manual radiator valve

MRV10 Please Note: This product is supplied in box quantities of 20 only.





15mm Straight manual radiator valve

MRV15STR Please Note: This product is supplied in box quantities of 20 only.





70

15mm Straight manual radiator valve with drain-off tail

#### MRV15D0

Please Note: This product is supplied in box quantities of 20 only.



15mm Angled manual radiator valve chrome

MRV15CP Please Note: This product is supplied in box quantities of 20 only.



10mm Straight manual radiator valve with drain-off tail

#### MRV10D0

Please Note: This product is supplied in box quantities of 20 only.





15mm Straight manual radiator valve chrome

#### MRV15STRCP

Please Note: This product is supplied in box quantities of 20 only.



03

E&OE

