


NC200CP.1 Multi Directional Non Concussive Basin Tap

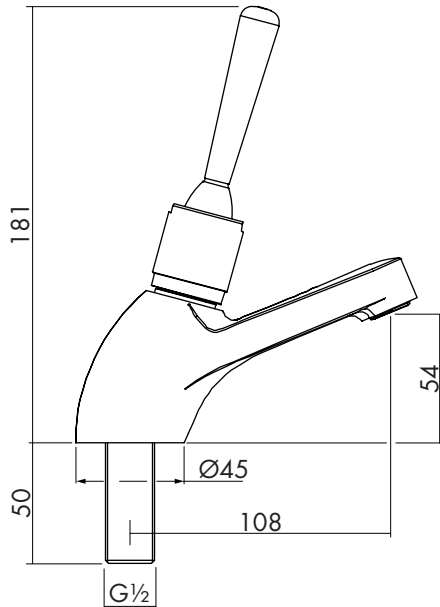

Operating Conditions

Max. Operating Pressure:	5 bar
Min. Operating Pressure:	0.2 bar
Max. Inlet Temperature:	65°C
Timed Flow @ 3 bar:	15 ± 3 sec
Max. Basin Thickness:	26mm

Water Byelaws

Your Inta taps must be connected in accordance with the Water Byelaws.

To prevent back flow and contamination of the water supply for drinking and culinary purposes taps must provide a **AUK2** or **AUK3** air gap between the outlet and basin.

Inta basin taps provide a type **AUK2** tap gap, for domestic usage, and a type **AUK3** for non domestic locations.

In order to prevent any risk of scalding, the hot tap should be connected via an Intamix Thermostatic Mixing Valve (40015CP)

It is recommended that a service valve is installed in the cold water supply pipe and the thermostatic mixing valve should have connections containing an isolating valve, in order to isolate the tap should servicing be required in the future.

Installation

For ease of installation we recommend that the tap is installed onto the basin prior to the basin being installed when access to the back nut is readily available.

If you are installing more than 1 tap onto a basin, for best practice hot water should be fitted onto the left side when facing the basin and cold onto the right.

Installation Continued

If replacing existing taps please ensure the water supply is turned off and that the old taps are completely removed before commencing with the install.

Fitting to Basin

Locate the rubber washers onto the threaded inlet before inserting through the hole in the basin.

Fit the backnut onto the threaded inlet and tighten to secure the tap. Do not over tighten the backnut.

Use a tap connector with a suitable sealing washer to connect onto the inlet side of the tap and ensure of a watertight joint.

Ensure the tap is secured in place and all connections are tight, turn on the water supply and check for leakages.

Operation

To operate the flow of water from the tap push the lever in any direction, after a period of time the flow of water will shut off.

Aftercare

Inta taps have a high quality finish and should be treated with care. An occasional wipe with a mild washing-up liquid on a soft damp cloth followed by a thorough rinsing is all that is required.

Do not use an abrasive or chemical household cleaner as this may cause damage.

Inta taps are manufactured to the highest standards and require little maintenance. The sealing washers should last for many years and are readily available.

Intatec Limited, Airfield Industrial Estate , Hixon, Stafford, ST18 0PF
Tel: 01889 272180 Email: sales@intatec.co.uk