inta Showering Collection

CONTENTS	SECTION	PAGE
PURO	3.01	202 - 211
КІКО	3.02	212 - 221
NULO	3.03	222 - 231
ENZO	3.04	232 - 241
MIO	3.05	242 - 251
TELO	3.06	252 - 257
SHOWER RISER KITS	3.07	258
BLISTER PACKS AND ACCESSORIES	3.08	260 - 262
TECHNICAL INFORMATION	3.09	264 - 274









The all new Puro collection from Inta is defined by the unique contemporary styling of the handles, oversized soaker and multi-function eco-air handset.

The Puro range is the ultimate combination of form and function featuring safe touch surface valve bodies and Inta's proven anti-scald thermostatic technology.

Bring inspiration, performance and peace of mind protection to your bathroom with Inta's Puro range.





Puro shower valves have been accredited TMV2 approval from NSF certification where you see this logo.



Puro showers have been approved by WRAS where you see this logo.



The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.



All Puro showers feature Inta's proven anti-scald thermostatic technology.



Eco air handsets deliver at a reduced flow rate whilst increasing showering performance.

inta Puro bar showers



3.01 Puro bath mixer and concentric showers



inta Puro concealed showers

SHOWER VALVE OPTIONS

RISER OPTIONS



PURO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET

PU40010CP



PURO CONCEALED THERMOSTATIC SHOWER DUAL OUTLET







IJ

PURO RINSE STATION with hose and eco-air handset PU70001CP PURO FLEXIBLE SLIDE RAIL KIT with wall outlet and

eco-air handset **PU70002CP**

3.01 Puro concealed showers

OVERHEAD SOAKER OPTIONS



CONCEALED SHOWER KITS

PURO CONCEALED THERMOSTATIC SHOWER with rinse station and eco-air handset **PURO10**

PURO CONCEALED THERMOSTATIC SHOWER with flexible slide rail kit, eco-air handset and wall elbow **PURO11**

PURO CONCEALED THERMOSTATIC SHOWER with overhead arm and soaker PURO12

PURO CONCEALED THERMOSTATIC SHOWER with ceiling arm and soaker **PURO13**

PURO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, rinse station and eco-air handset **PURO20**

PURO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, flexible slide rail kit, eco-air handset and wall elbow PURO21

PURO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, rinse station and eco-air handset **PURO22**

PURO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, flexible slide rail kit, eco-air handset and wall elbow **PURO23**

Puro Deluxe

Create the luxurious look in your bathroom with the Deluxe range; featuring large overhead revitalising drench soakers and push button handsets that deliver the indulgence of a spa into your own bathroom.



SAFE TOUCH BODY The constant circulation of cold water the surface will never be hot to touch.



TELESCOPIC RISER





MULTI-FUNCTION HANDSET



ADJUSTABLE FIXING POINTS FOR RISER Allows the installer to set fixing centres accordingly for specific installation.



All Puro showers feature Inta's proven anti-scald thermostatic technology.



Eco air handsets deliver at a reduced flow rate whilst increasing showering





been accredited TMV2 approval from NSF Certification where you see this logo.



Puro shower valves have Puro showers have been approved by WRAS where you see this logo.



The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.

3.01 Puro Deluxe bar showers



inta **Puro Deluxe concealed showers**

SHOWER VALVE OPTIONS

RISER OPTIONS



PURO CONCEALED THERMOSTATIC SHOWER

PU40010CP





PURO CONCEALED THERMOSTATIC SHOWER



DELUXE PURO RINSE STATION

PU70005CP

DELUXE PURO FLEXIBLE SLIDE RAIL KIT PU70006CP

3.01 Puro Deluxe concealed showers

OVERHEAD SOAKER OPTIONS



CONCEALED SHOWER KITS

PURO CONCEALED THERMOSTATIC SHOWER with rinse station and push button handset PUROD10

PURO CONCEALED THERMOSTATIC SHOWER with flexible slide rail kit, push button handset and wall elbo PUROD11

PURO CONCEALED THERMOSTATIC SHOWER with overhead arm and large stainless steel soaker PUROD12

PURO CONCEALED THERMOSTATIC SHOWER with ceiling arm and large stainless steel soaker PUROD13

PURO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, rinse station and push button handset PUROD20 PURO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow **PUROD21**

PURO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, rinse station and push button handset PUROD22

PURO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow PUROD23







Modern and fast-paced like today's city living. The Kiko range is defined by clean lines and efficiency, with a stylish soaker head and minimalist accessories. Be modern, be bold, be reassured by Inta's Kiko showering.





Kiko shower valves have been accredited TMV2 approval from NSF Certification where you see this logo.



All Kiko showers feature Inta's proven anti-scald thermostatic technology.



Kiko showers have been approved by WRAS where you see this logo.

inta Kiko bar showers



3.02 Kiko bath mixer and concealed showers



inta Kiko concealed showers

SHOWER VALVE OPTIONS

RISER OPTIONS



3.02 Kiko concealed showers

OVERHEAD SOAKER OPTIONS



CONCEALED SHOWER KITS

KIKO CONCEALED THERMOSTATIC SHOWER with rinse station and 5 function handset KIKO10

KIKO CONCEALED THERMOSTATIC SHOWER with flexible slide rail kit, 5 function handset and wall elbow **KIKO11**

KIKO CONCEALED THERMOSTATIC SHOWER with overhead arm and soaker

KIKO12

KIKO CONCEALED THERMOSTATIC SHOWER with ceiling arm and soaker KIKO13

KIKO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, rinse station and 5 function handset **KIKO20**

KIKO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, flexible slide rail kit, 5 function handset and wall elbow KIKO21

KIKO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, rinse station and 5 function handset **KIKO22**

KIKO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, flexible slide rail kit, 5 function handset and wall elbow KIKO23

KIKO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with overhead arm, soaker, rinse station and 5 function handset $\ensuremath{\textbf{KIKO30}}$

KIKO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with overhead arm, soaker, flexible slide rail kit, 5 function handset and wall elbow $% \left({{{\rm{A}}_{\rm{B}}} \right)$

KIKO31

KIKO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with ceiling arm, soaker, rinse station and 5 function handset $\ensuremath{\textbf{KIKO32}}$

KIKO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, flexible slide rail kit, 5 function handset

and wall elbow KIKO33

Kiko Deluxe

Create the luxurious look in your bathroom with the Deluxe range; featuring large overhead revitalising drench soakers and push button handsets that deliver the indulgence of a spa into your own bathroom.

MINIMALISTIC BODY With easy to operate peg style handles.



TELESCOPIC RISER

Allows the height of the riser to be easily adjusted and fixed according to requirement. The riser can also be adjusted horizontally to accommodate uneven walls.







for specific installation.



Kiko shower valves have been accredited TMV2 approval from NSF Certification where you see this logo.



The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.



All Kiko bar showers feature Inta's proven anti-scald thermostatic technology.



Kiko showers have been approved by WRAS where you see this logo.


3.02 Kiko Deluxe bar showers



Inta Kiko Deluxe concealed showers

SHOWER VALVE OPTIONS

RISER OPTIONS

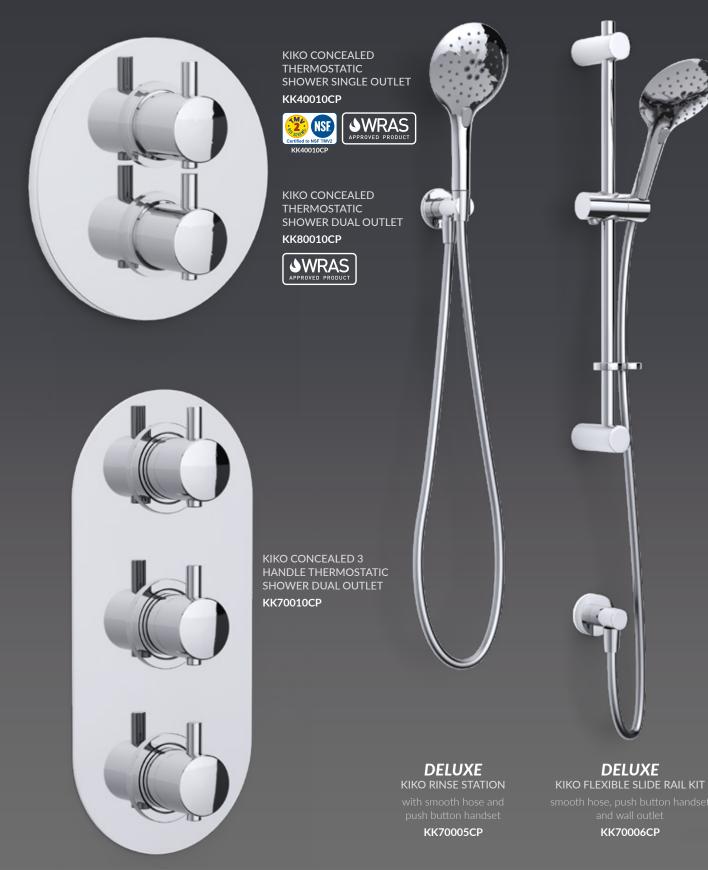

5.01 Kiko Deluxe concealed showers

OVERHEAD SOAKER OPTIONS



CONCEALED SHOWER KITS

KIKO CONCEALED THERMOSTATIC SHOWER with rinse station and push button handset KIKOD10

KIKO CONCEALED THERMOSTATIC SHOWER with flexible slide rail kit, push button handset and wall elbow KIKOD11

KIKO CONCEALED THERMOSTATIC SHOWER with overhead arm and large stainless steel soaker KIKOD12

KIKO CONCEALED THERMOSTATIC SHOWER with ceiling arm and large stainless steel soaker KIKOD13

KIKO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, rinse station and push button handset KIKOD20

KIKO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow

KIKOD21

KIKO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, rinse station and push button handset

KIKOD22

KIKO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow

KIKOD23

KIKO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with overhead arm, large stainless steel soaker, rinse station and push button handset

KIKOD30

KIKO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow KIKOD31_____

KIKO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with ceiling arm, large stainless steel soaker, rinse station and push button handset

KIKOD32


KIKO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow KIKOD33







Geometric precision and minimalistic styling define the Nulo range. Combined with thermostatic protection and innovative features to aid installation, it's a popular and reliable choice time after time. The Nulo range has it all.

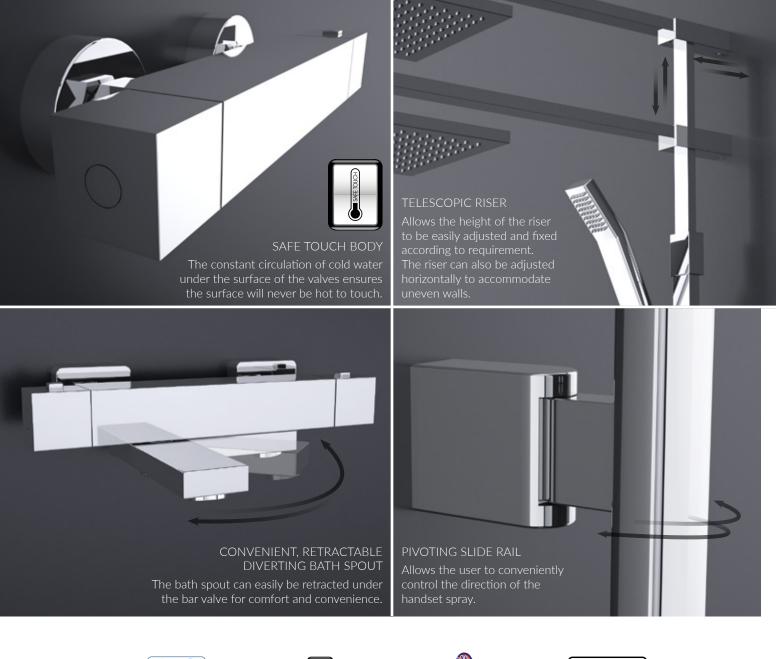



Nulo shower valves have been accredited TMV2 approval from NSF Certification where you see this logo.



The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.



All Nulo bar showers feature Inta's proven anti-scald thermostatic technology.



Nulo showers have been approved by WRAS where you see this logo.

inta Nulo bar showers




3.03 Nulo bath mixer and concealed showers



inta Nulo concealed showers

SHOWER VALVE OPTIONS

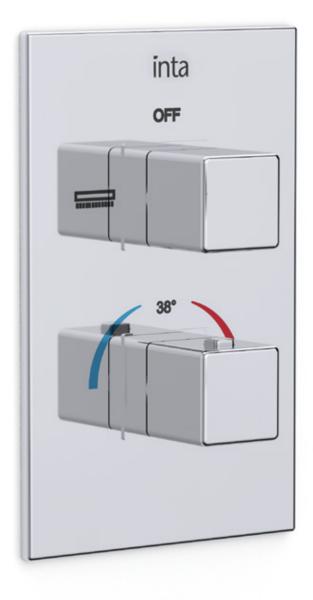

NULO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET







RISER OPTIONS



NULO RINSE STATION with hose and handset CB70001CP NULO FLEXIBLE SLIDE RAIL KIT with wall outlet and handset CB70002CP

3.03 Nulo concealed showers

OVERHEAD SOAKER OPTIONS



CONCEALED SHOWER KITS

NULO CONCEALED THERMOSTATIC SHOWER with rinse station and handset NULO10

NULO CONCEALED THERMOSTATIC SHOWER with flexible slide rail kit, handset and wall elbow **NULO11**

NULO CONCEALED THERMOSTATIC SHOWER with overhead arm and soaker NUL012

NULO12

NULO CONCEALED THERMOSTATIC SHOWER with ceiling arm and soaker NUL013 NULO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, rinse station and handset NULO20

NULO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, flexible slide rail kit, handset and wall elbow

NULO21

NULO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, rinse station and handset **NULO22**

NULO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, flexible slide rail kit, handset and wall elbow **NULO23**

Nulo Deluxe

Create the luxurious look in your bathroom with the Deluxe range; featuring large overhead revitalising drench soakers and push button handsets that deliver the indulgence of a spa into your own bathroom.





Nulo shower valves have been accredited TMV2 approval from NSF Certification where you see_this logo.



The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.



All Nulo bar showers feature Inta's proven anti-scald thermostatic technology.



Nulo showers have been approved by WRAS where you see this logo.

Nulo Deluxe bar showers



DELUXE

NULO SAFE TOUCH THERMOSTATIC BAR SHOWER (DUAL OUTLET)






inta Nulo Deluxe concealed showers

SHOWER VALVE OPTIONS



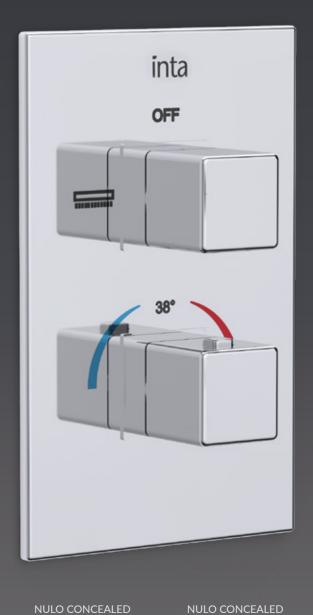

NULO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET CB40010CP







THERMOSTATIC SHOWER DUAL OUTLET CB80010CP












DELUXE CB70005CP

DELUXE NULO FLEXIBLE SLIDE RAIL KIT CB70006CP



3.03 Nulo Deluxe concealed showers

OVERHEAD SOAKER OPTIONS

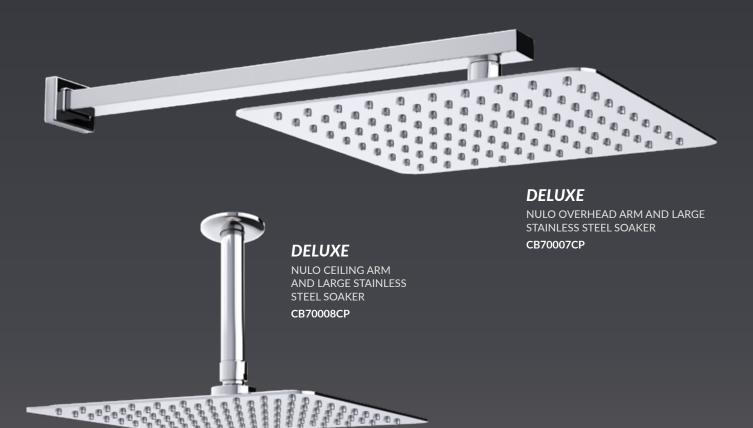

CONCEALED SHOWER KITS

NULO CONCEALED THERMOSTATIC SHOWER with rinse station and push button handset NULOD10

NULO CONCEALED THERMOSTATIC SHOWER with flexible slide rail kit, push button handset and wall elbow **NULOD11**

NULO CONCEALED THERMOSTATIC SHOWER with overhead arm and large stainless steel soaker NULOD12

NULO CONCEALED THERMOSTATIC SHOWER with ceiling arm and large stainless steel soaker NULOD13

NULO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, rinse station and push button handset NULOD20 NULO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow NULOD21

NULO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, rinse station and push button handset NULOD22

NULO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow NULOD23







The new enzo range from Inta is a real best seller.

Beautifully subtle curved lines and simple form belie the technology that is packed into each shower. Enzo is both safe to touch during operation and thermostatically controlled so that it protects from delivering water that is hot enough to scald.





Enzo shower valves have been accredited TMV2 approval from NSF Certification where you see this logo.



The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.



All Enzo bar showers feature Inta's proven anti-scald thermostatic technology.



Enzo showers have been approved by WRAS where you see this logo.

inta Enzo bar showers



3.04 Enzo bath mixer and concealed showers



inta Enzo concealed showers

SHOWER VALVE OPTIONS

RISER OPTIONS



3.04 Enzo concealed showers

OVERHEAD SOAKER OPTIONS



CONCEALED SHOWER KITS

ENZO CONCEALED THERMOSTATIC SHOWER with rinse station and push button handset ENZO10

ENZO CONCEALED THERMOSTATIC SHOWER with flexible slide rail kit, push button handset and wall elbow ENZO11

ENZO CONCEALED THERMOSTATIC SHOWER with overhead arm and soaker ENZO12

ENZO CONCEALED THERMOSTATIC SHOWER with ceiling arm and soaker ENZO13

ENZO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, rinse station and push button handset **ENZO20**

ENZO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, flexible slide rail kit, push button handset and wall elbow

ENZO21

ENZO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, rinse station and push button handset **ENZO22**

ENZO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, flexible slide rail kit, push button handset and wall elbow ENZO23

ENZO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with overhead arm, soaker, rinse station and push button handset $\ensuremath{\textbf{ENZO30}}$

ENZO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with overhead arm, soaker, flexible slide rail kit, push button handset and wall elbow

ENZO31

ENZO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER


with ceiling arm, soaker, rinse station and push button handset $\ensuremath{\textbf{ENZO32}}$

ENZO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with ceiling arm, soaker, flexible slide rail kit, push button handset and wall elbow ${\sf E}NZO33$

Enzo Deluxe

Create the luxurious look in your bathroom with the Deluxe range; featuring large overhead revitalising drench soakers and push button handsets that deliver the indulgence of a spa into your own bathroom.

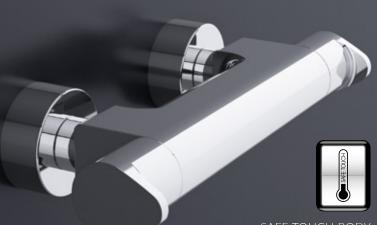

SAFE TOUCH BODY The constant circulation of cold water the surface will never be hot to touch.

TELESCOPIC RISER

adjusted and fixed according to requirement. The riser can also be adjusted horizontally





Enzo shower valves have been accredited TMV2 approval from NSF Certification where you



The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.



for specific installation.

ADJUSTABLE FIXING POINTS FOR RISER Allows the installer to set fixing centres accordingly

All Enzo bar showers feature Inta's proven anti-scald thermostatic



approved by WRAS where you see this logo.

Enzo Deluxe bar showers



ENZO SAFE TOUCH THERMOSTATIC BAR SHOWER (DUAL OUTLET)






Inta Enzo Deluxe concealed showers

SHOWER VALVE OPTIONS

RISER OPTIONS



ENZO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET EN40010CP



ENZO CONCEALED THERMOSTATIC SHOWER DUAL OUTLET EN80010CP



ENZO CONCEALED 3 HANDLE THERMOSTATIC SHOWER DUAL OUTLET EN70010CP

DELUXE

ENZO RINSE STATION with smooth hose and push button handset EN70005CP DELUXE ENZO FLEXIBLE SLIDE RAIL KIT with smooth hose, push button handset and wall outlet EN70006CP

Enzo Deluxe concealed showers

OVERHEAD SOAKER OPTIONS



CONCEALED SHOWER KITS

ENZO CONCEALED THERMOSTATIC SHOWER ENZOD10

ENZO CONCEALED THERMOSTATIC SHOWER **FN70D11**

ENZO CONCEALED THERMOSTATIC SHOWER ENZOD12

ENZO CONCEALED THERMOSTATIC SHOWER with ceiling arm and large stainless steel soaker ENZOD13

with overhead arm, large stainless steel soaker, rinse station and push button handset

ENZOD20

FN70D21

ENZO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, flexible slide rail kit, push button handset and wall elbow

ENZOD23

ENZO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER

with overhead arm, large stainless steel soaker, rinse station

ENZOD30

ENZO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC

ENZOD31

ENZO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC

ENZOD32

ENZO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC

ENZOD33

ENZOD22







Beautiful lines and subtle edges define the Mio range. Create the bathroom you really want with the peace of mind that goes with Inta's anti-scald thermostatic protection.



inta Mio bar showers



3.05 Mio bath mixer and concealed showers



Inta Mio concealed showers

SHOWER VALVE OPTIONS

RISER OPTIONS



E&OE

3.05 Mio concealed showers

OVERHEAD SOAKER OPTIONS Mic OVERHEAD SOAKER WITH CHIEF ALL FEATURE MIC OVERHEAD SOAKER MIC CEILING ARM AND SOAKER MIT 70004CP

CONCEALED SHOWER KITS

SINGLE OUTLET

MIO CONCEALED THERMOSTATIC SHOWER with rinse station and handset MIO10

MIO CONCEALED THERMOSTATIC SHOWER with adjustable flexible slide rail kit, handset and wall elbow MIO11

MIO CONCEALED THERMOSTATIC SHOWER with overhead arm and soaker MIO12

MIO CONCEALED THERMOSTATIC SHOWER with ceiling arm and soaker MIO13

DUAL OUTLET

MIO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, rinse station and handset MIO20

MIO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, adjustable flexible slide rail kit, handset and wall elbow MIO21

MIO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, rinse station and handset **MIO22**

MIO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, adjustable flexible slide rail kit, handset and wall elbow MIO23

THREE HANDLE

MIO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, rinse station and handset **MIO30**

MIO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, soaker, adjustable flexible slide rail kit, handset and wall elbow MIO31

MIO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, rinse station and handset MIO32

MIO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, soaker, adjustable flexible slide rail kit, handset and wall elbow MIO33

MIO CONCEALED 3 HANDLE TRIPLE OUTLET THERMOSTATIC SHOWER with overhead soaker with waterfall feature, rinse station and handset MIO34

MIO CONCEALED 3 HANDLE TRIPLE OUTLET THERMOSTATIC SHOWER with overhead soaker with waterfall feature, adjustable flexible slide rail kit, handset and wall elbow MIO35

Mio Deluxe

Create the luxurious look in your bathroom with the Deluxe range; featuring large overhead revitalising drench soakers and push button handsets that deliver the indulgence of a spa into your own bathroom.



SAFE TOUCH BODY The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.

TELESCOPIC RISER

Allows the height of the riser to be easily adjusted and fixed according to requirement. The riser can also be adjusted horizontally to accommodate uneven walls.



OVERHEAD SOAKER

Switch between the invigorating rainfall soaker or the relaxing waterfall function and bring an indulgent spa experience into your own bathroom.

ADJUSTABLE FIXING POINTS FOR RISER

Allows the installer to set fixing centres accordingly for specific installation.



Mio shower valves have been accredited TMV2 approval from NSF Certification where you see this logo.



The constant circulation of cold water under the surface of the valves ensures the surface will never be hot to touch.



All Mio showers feature Inta's proven anti-scald thermostatic technology.



Mio showers have been approved by WRAS where you see this logo.

3.05 Mio Deluxe bar showers



DELUXE

MIO SAFE TOUCH THERMOSTATIC BAR <u>SHOWER (DU</u>AL OUTLET)

with adjustable riser, large stainless steel soaker push button handse and smooth hose






Inta Mio Deluxe concealed showers

SHOWER VALVE OPTIONS

RISER OPTIONS

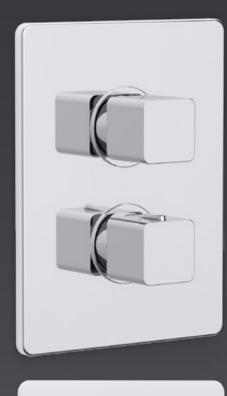


MIO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET MM40010CP **WRAS NSF** MM40010CP **MIO CONCEALED** THERMOSTATIC SHOWER DUAL OUTLET MM80010CP **WRAS** APPROVED PROD MIO CONCEALED 3 HANDLE THERMOSTATIC SHOWER DUAL MM70010CP MIO CONCEALED 3 HANDLE THERMOSTATIC SHOWER TRIPLE MM70030CP

DELUXE ORINSE STATION In smooth hose and sh button handset MM70005CP **DELUXE** MIO FLEXIBLE SLIDE RAIL KIT

> and wall outlet MM70006CP

E&OE

Mio Deluxe concealed showers

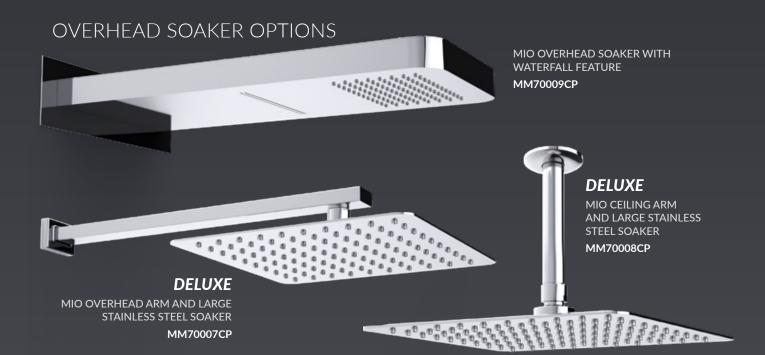

CONCEALED SHOWER KITS

SINGLE OUTLET

MIO CONCEALED THERMOSTATIC SHOWER with rinse station and push button handset MIOD10

MIO CONCEALED THERMOSTATIC SHOWER with adjustable flexible slide rail kit, push button handset and wall

MIOD11

MIO CONCEALED THERMOSTATIC SHOWER with overhead arm and large stainless steel soake MIOD12

MIO CONCEALED THERMOSTATIC SHOWER with ceiling arm and large stainless steel soaker MIOD13

DUAL OUTLET

MIO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, rinse station and push button handset

MIOD20

MIO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, adjustable flexible slide rail kit, push button handset and wall elbow MIOD21

MIO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, rinse station and push button handset

MIOD22

MIO CONCEALED DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, adjustable flexible slide rail kit, push

button handset and wall elbow

MIOD23

THREE HANDLE

MIO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, rinse station and push button handset MIOD30

MIO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with overhead arm, large stainless steel soaker, adjustable flexible slide rail kit

push button handset and wall elbow MIOD31

MIO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, rinse station and push button handset

MIOD32

MIO CONCEALED 3 HANDLE DUAL OUTLET THERMOSTATIC SHOWER with ceiling arm, large stainless steel soaker, adjustable flexible slide rail kit, push button handset and wall elbow MIOD33

MIO CONCEALED 3 HANDLE TRIPLE OUTLET THERMOSTATIC SHOWER with overhead soaker with waterfall feature, rinse station and handset MIOD34

MIO CONCEALED 3 HANDLE TRIPLE OUTLET THERMOSTATIC SHOWER with overhead soaker with waterfall feature, adjustable flexible slide rail kit, handset and wall elbow MIOD35








The popular style of the Telo range ensures that it's at home in whatever setting it is installed. A flagship product of the Inta range, the Telo has proven

itself time and time again to be a popular choice.

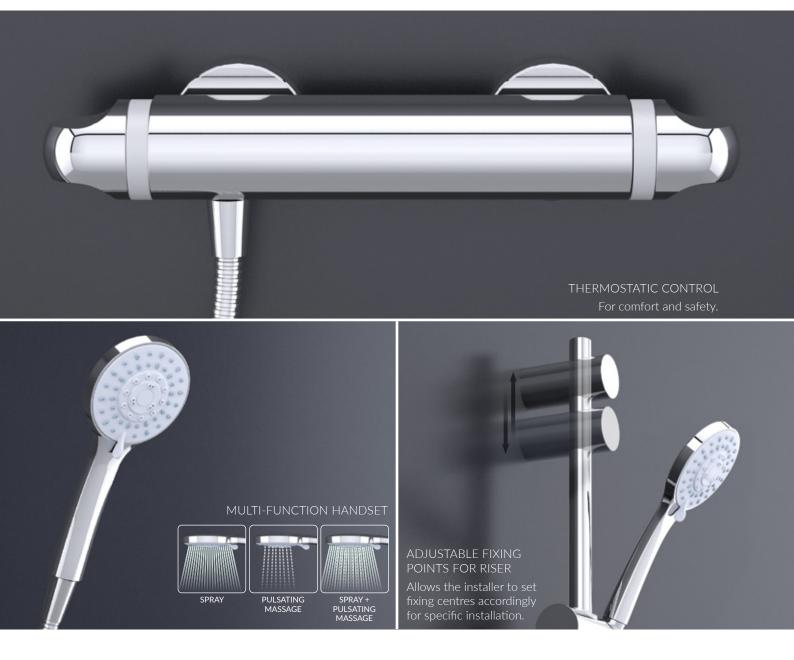



Telo shower valves have been accredited TMV2 approval from NSF Certification where you see this logo.



All Telo bar showers feature Inta's proven anti-scald thermostatic technology.



Telo showers have been approved by WRAS where you see this logo.

Inta Telo bar and bath mixer showers





255

TELO THERMOSTATIC BATH FILLER - WALL MOUNTED

TELO THERMOSTATIC BATH FILLER - DECK MOUNTED
TL50020CP



E&OE

inta Telo concealed showers

SHOWER VALVE OPTIONS

RISER OPTIONS



TELO RINSE STATION with hose and handset TL70001CP TELO FLEXIBLE SLIDE RAIL KIT with wall outlet and handset TL70002CP

3.06 Telo concealed showers

OVERHEAD SOAKER OPTIONS



CONCEALED SHOWER KITS

TELO CONCEALED THERMOSTATIC SHOWER with rinse station and handset **TEL10**

TELO CONCEALED THERMOSTATIC SHOWER with adjustable flexible slide rail kit, handset and wall elbow TEL11 TELO CONCEALED THERMOSTATIC SHOWER with overhead arm and soaker TEL12

TELO CONCEALED THERMOSTATIC SHOWER with ceiling arm and soaker TEL13

inta Shower riser kits



3.07 Shower riser kits



31678CP

with handset MM31669CP with multi-function handset

31665CPA.1

inta **Blister packs**







MODERN FLEXIBLE SLIDE RAIL KIT

MIO FLEXIBLE SLIDE RAIL KIT 31669BLR

31885BLR

PRIMO FLEXIBLE SLIDE RAIL KIT 31441BLR

260

3.08 Blister packs



MULTI-FUNCTION SHOWER HEAD 31881BLR



SHOWER HOSE

THE SHOWER INTA

30003CPXBLR 1.5 metre large bore sho

SINGLE FUNCTION SHOWER HEAD 31991BLR



VERSO LARGE ECO-AIR HANDSET 71601BLR

e&oe

inta Accessories









20002CP

WALL MOUNTS FOR USE WITH BAR SHOWER VALVES (PAIR)) 20003CP FAST FIX BRACKETS (PAIR) wall mounted brackets for easy installation 20010CP

20009CP

FAST FIX BRACKET (SINGLE) wall mounted bracket for easy installation 20009CP ROUND DECK MOUNTING PILLARS (PAIR) for use with bath shower mixers 20002CP

SQUARE DECK MOUNTING PILLARS (PAIR) for use with bath shower mixers 10069CP



REPLACEMENT SHOWER HOSES FOR USE WITH ALL INTA SHOWERS

1.5M BRAIDED METAL SHOWER HOSE: 30003CPX 2M BRAIDED METAL SHOWER HOSE: 30006CPX 1.5M FLEXI HOSE (SMOOTH) : 800030CP





CLICK CLACK BASIN WASTE ID9140 SHOWER FLOW REGULATORS SHOWER FLOW REGULATOR 6 LITRE (GREEN): SYRP6LF SHOWER FLOW REGULATOR 8 LITRE (WHITE): SYRP8LF SHOWER FLOW REGULATOR 10 LITRE (BLUE): SYRP10LF

E&OE

For more information on any of our product ranges, please visit our website



intatec.co.uk

Where you can also find:

Latest news
 Product information
 Data sheets
 FAQs


- Product registration
 Brochures and price lists
- Technical information
 Videos
 Image library



inta Puro range technical information


PURO SAFE TOUCH THERMOSTATIC BAR SHOWER (DUAL OUTLET) PU10032CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" (valve body)
- Outlet connections: G 1/2 \H' BSP (top) and G 1/2 \H' BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C




PURO SAFE TOUCH THERMOSTATIC BAR SHOWER PU10031CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" (valve body)
- Outlet connections: G 1/2" BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C




PURO SAFE TOUCH THERMOSTATIC BATH SHOWER MIXER PU90015CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP
- Minimum temperature differential to achieve failsafe: 15°C



PURO THERMOSTATIC MINI CONCENTRIC DUAL CONTROL SHOWER PU90014CP


- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: 15mm compression
- Outlet connections: G 1/2" BSP (top or bottom)
- Minimum temperature differential to achieve failsafe: 15°C
- 150mm centre connection elbows PU20004CP



3.09 Puro range technical information


PURO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET PU40010CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: 15mm compression
- Outlet connections: 15mm compression
- Minimum temperature differential to achieve failsafe: 15°C

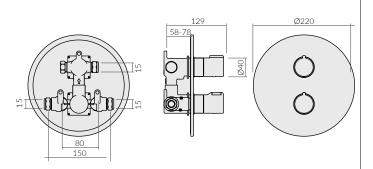


PURO / PURO DELUXE OVERHEAD ARM AND SOAKER PU70003CP / PU70007CP

- Inlet connections: G 1/2"
- Outlet connections: G 1/2" BSP




PURO CONCEALED THERMOSTATIC SHOWER DUAL OUTLET PU80010CP


- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: 15mm compression
- Outlet connections: 15mm compression
- Minimum temperature differential to achieve failsafe: 15°C



PURO / PURO DELUXE CEILING ARM AND SOAKER PU70004CP / PU70008CP

- Inlet connections: G 1/2"
- Outlet connections: G 1/2" BSP






PU70004CP

PU70008CP

inta Kiko range technical information


KIKO THERMOSTATIC BAR SHOWER (DUAL OUTLET) KK10032CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP (top) and G 1/2" BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: KD11




KIKO THERMOSTATIC BAR SHOWER KK10031CP


- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: VC10FLNF



KIKO THERMOSTATIC BATH SHOWER MIXER KK90015CP


- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body)
- G 3/4" BSP (Deck mounted legs)
- Outlet connections: G 3/4" BSP / shower outlet 1/2"
- Minimum temperature differential to achieve failsafe: 15°C • Thermostatic cartridge: 10017
- Flow cartridge: KD11





KIKO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET KK40010CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2
- Outlet connections: G 1/2"
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 2402PL
- Flow cartridge: VC02NF




3.09 Kiko range technical information

KIKO CONCEALED THERMOSTATIC SHOWER DUAL OUTLET KK80010CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2"
- Outlet connections: G 1/2"
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 2402APL
- Flow cartridge: KD05

KIKO / KIKO DELUXE OVERHEAD ARM AND SOAKER KK70003CP / KK70007CP


- Inlet connections: G 1/2"
- Outlet connections: G 1/2" BSP



KIKO CONCEALED THREE HANDLE THERMOSTATIC SHOWER DUAL OUTLET

KK70010CP


- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2"
- Outlet connections: G 1/2"
- Minimum temperature differential to achieve failsafe: 15°C




KIKO / KIKO DELUXE CEILING ARM AND SOAKER KK70004CP / KK70008CP

2

- Inlet connections: G 1/2"
- Outlet connections: G 1/2" BSP





KK70004CP


KK70008CP

inta Nulo range technical information

NULO SAFE TOUCH THERMOSTATIC BAR SHOWER (DUAL OUTLET)


CB10032CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Factory pre-set temperature: 38°C
- Inlet connections: G 3/4" (valve body)
- Outlet connections: G 1/2" BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C




NULO THERMOSTATIC BATH SHOWER MIXER CB90015CP

- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body) G 3/4" BSP (Deck mounted legs)
- Outlet connections: G 3/4" BSP / shower outlet 1/2"
- Minimum temperature differential to achieve failsafe: 15°C



NULO SAFE TOUCH THERMOSTATIC BAR SHOWER CB10031CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Factory pre-set temperature: 38°C
- Inlet connections: G 3/4" (valve body)
- Outlet connections: G 1/2" BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C




NULO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET CB40010CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: 15mm compression
- Outlet connections: 15mm compression
- Minimum temperature differential to achieve failsafe: 15°C

144

20






3.09 Nulo range technical information


NULO CONCEALED THERMOSTATIC SHOWER DUAL OUTLET CB80010CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: 15mm compression
- Outlet connections: 15mm compression
- Minimum temperature differential to achieve failsafe: 15°C



NULO / NULO DELUXE CEILING ARM AND SOAKER

- CB70004CP / CB70008CP
- Inlet connections: G 1/2"
- Outlet connections: G 1/2" BSP




CB70004CP

CB70008CP

NULO / NULO DELUXE CEILING ARM AND SOAKER

CB70004CP / CB70007CP

- Inlet connections: G 1/2["]
- Outlet connections: G 1/2" BSP




Inta Enzo range technical information

ENZO SAFE TOUCH THERMOSTATIC BAR SHOWER (DUAL OUTLET) EN10032CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" (valve body)
- Outlet connections: G 1/2 ${\rm "}$ BSP (top) and G 1/2 ${\rm "}$ BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: KD11


ENZO SAFE TOUCH THERMOSTATIC BAR SHOWER EN10031CP


- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" (valve body)
- Outlet connections: G 1/2" BSP
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: VC10FLNF

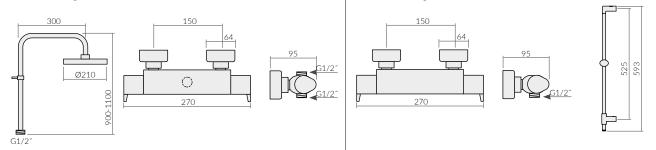

ENZO SAFE TOUCH THERMOSTATIC BATH SHOWER MIXER EN90015CP


- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: KD11





ENZO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET EN40010CP


- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2"
- Outlet connections: G 1/2" BSP
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 2402APL
- Flow cartridge: VC02NF



3.09 Enzo range technical information


ENZO CONCEALED THERMOSTATIC SHOWER DUAL OUTLET EN80010CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2"
- Outlet connections: G 1/2"
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 2402APL
- Flow cartridge: KD05




ENZO / ENZO DELUXE OVERHEAD ARM AND SOAKER EN70003CP / EN70007CP

- Inlet connections: G 1/2"
- Outlet connections: G 1/2" BSP



ENZO CONCEALED THREE HANDLE THERMOSTATIC SHOWER DUAL OUTLET EN70010CP


- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2"
- Outlet connections: G 1/2"
- Minimum temperature differential to achieve failsafe: 15°C




ENZO / ENZO DELUXE CEILING ARM AND SOAKER EN70004CP / EN70008CP

20

- Inlet connections: G 1/2"
- Outlet connections: G 1/2" BSP





EN70004CP

EN70008CP


inta Mio range technical information

MIO SAFE TOUCH THERMOSTATIC BAR SHOWER (DUAL OUTLET) MM10032CP

• 5 bar maximum inlet pressure (static)


- 0.4 bar minimum inlet pressure (dynamic)
- Factory pre-set temperature: 38°C
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017



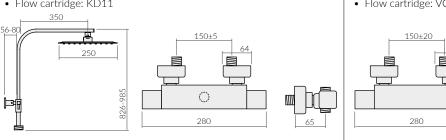


MIO SAFE TOUCH THERMOSTATIC BATH SHOWER MIXER MM90015CP

- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 3/4" BSP / shower outlet 1/2"
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: KD11




MIO CONCEALED THERMOSTATIC SHOWER DUAL OUTLET MM80010CP

- 5 bar maximum inlet pressure (static)
- 0.4 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2
- Outlet connections: G 1/2"
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 2402APL
- Flow cartridge: KD05




MIO SAFE TOUCH THERMOSTATIC BAR SHOWER MM10031CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Factory pre-set temperature: 38°C
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: VC10FLNF



MIO CONCEALED THERMOSTATIC SHOWER SINGLE OUTLET MM40010CP


- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2
- Outlet connections: G 1/2"
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 2402APL
- Flow cartridge: VC02NF




MIO CONCEALED THREE HANDLE THERMOSTATIC SHOWER DUAL OUTLET

MM70010CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2[°]
- Outlet connections: G 1/2" BSP
- Minimum temperature differential to achieve failsafe: 15°C



3.09 Mio range technical information

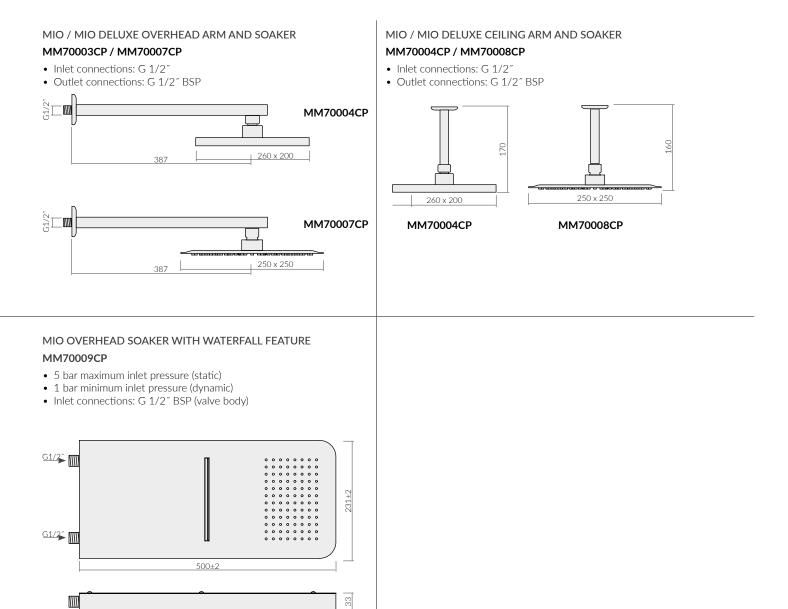


Inta Telo range technical information

TELO THERMOSTATIC SHOWER


TL10014CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: VT01V1




TELO THERMOSTATIC BATH SHOWER MIXER TL30024CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP (bottom)
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: VT01V1



TELO THERMOSTATIC BATH FILLER TL50010CP


- E bar maximum inlat proceur
- 5 bar maximum inlet pressure (static) 0.2 bar minimum inlet pressure (dynamic)
- 0.2 bar minimum met pressure (dynamic)
 Inlet connections: G 3/4" F BSP (valve body)
- Outlet connections: G 1/2" BSP (valve bot
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 10017
- Flow cartridge: VT01V1



TELO THERMOSTATIC CONCEALED SHOWER

TL40014CP

- 5 bar maximum inlet pressure (static)
- 0.2 bar minimum inlet pressure (dynamic)
- Inlet connections: G 1/2"
- Outlet connections: G 1/2²
- Minimum temperature differential to achieve failsafe: 15°C
- Thermostatic cartridge: 2402APL
- Flow cartridge: VC02NF



HPERI Heat Interface Unit





Features

- ☑ Radiator Heating or underfloor (UFH)
- ☑ Optimised heating function
- Pump protection against pump sticking
- Pay as you go (prepayment) switching
- Integral shut off for pay as you go (payg) no external valve required
- Auto fault diagnostics
- Modbus communications to report system conditions or fault conditions to a central monitor or BMS
- Automatic closing of the control valve when power lost for anti-scald and stop unnecessary heat returns
- $\mathbf{ec{U}}$ Lift up panel to view heat meter calculator
- ☑ 16 bar pressure rated primary (DH) side

Design

- ☑ Three Flushing and Bypass options
- Temperature controlled Keep Warm function
- 🗹 Test Ports
- UFH slab drying cycle
- Frost protection function
- PWM pump speed control
- Pressure Differential and Flow Control by fast acting PICV with Stepper Actuator
- ☑ Integral Shock Arrestor for cold water supply
- 3 Strainers, one for each circuit
- **Filling group for Heating Circuit**

Functional Features

- Start up menu for commissioning
- Set time and date
- Programmable control for heating flow
- Program the return temperature limit on Keep Warm function
- Manual pump override (for test)
- Room thermostat normally open or closed option
- Additional switch for adding a second pump to load a cylinder or use as an alarm
- Optional programme to add a temperature controlled hot water storage cylinder
- Anti-legionella cycle for when adding hot water storage
- Select which plate heat exchanger to use for the keep warm function to limit scale formation

°C

29



High temperature test results	°C	Low temperature test results
DHW VWART	15	DHW VWART
Standby VWART	38	Standby VWART
Space Heating VWART	41	Space Heating VWART
Overall result	28	Overall result

BIM Level 2 Ready and Revit Models are available via BIMstore: www.bimstore.co/manufacturers/intatec

inta

 Intatec Limited

 Airfield Industrial Estate, Hixon, Staffordshire ST18 OPF

 t. 01889 272180
 f. 01889 272181

 e. sales@intatec.co.uk

 www.intatec.co.uk

 Proud to be a leading British Brand