



Introduction

The NEW 'ActivFlo⁺' by Inta - features a 22mm compression inlet connection, however has a lower operational flow requirement than a standard 22mm unit. This makes ActivFlo⁺ the ideal solution for installations with 22mm pipework that cannot achieve the higher required flow rate of a standard unit. Included as standard with this product is a set of 15x22mm reducers enabling a 2 in 1 solution, all in the same box! Featuring ActivFlo's unique patented alloy coil, the unit uses a catalytic method of water treatment to change the calcium and bicarbonate ions to precipitate from the water forming an insoluble microscopic calcium carbonate crystal called aragonite, the smooth surface of this crystal cannot adhere to surfaces.

Features and Benefits:

- Internal slip socket connection
- Life expectancy in excess of 20 years
- Suitable For whole house protection
- *15 year warranty
- Supplied with 15mm reducing sets as standard*
- Fit and forget installation
- Stainless steel housing
- No power supply required
- 22mm inlet connection




Product Range

Code	Description
AF022PL	22mm ActivFlo ⁺ complete with 15mm reducing set

Technical Specification

Maximum Operating Pressure	16 Bar
Maximum Operating Temperature	99°C
Inlet Connection Type	Compression

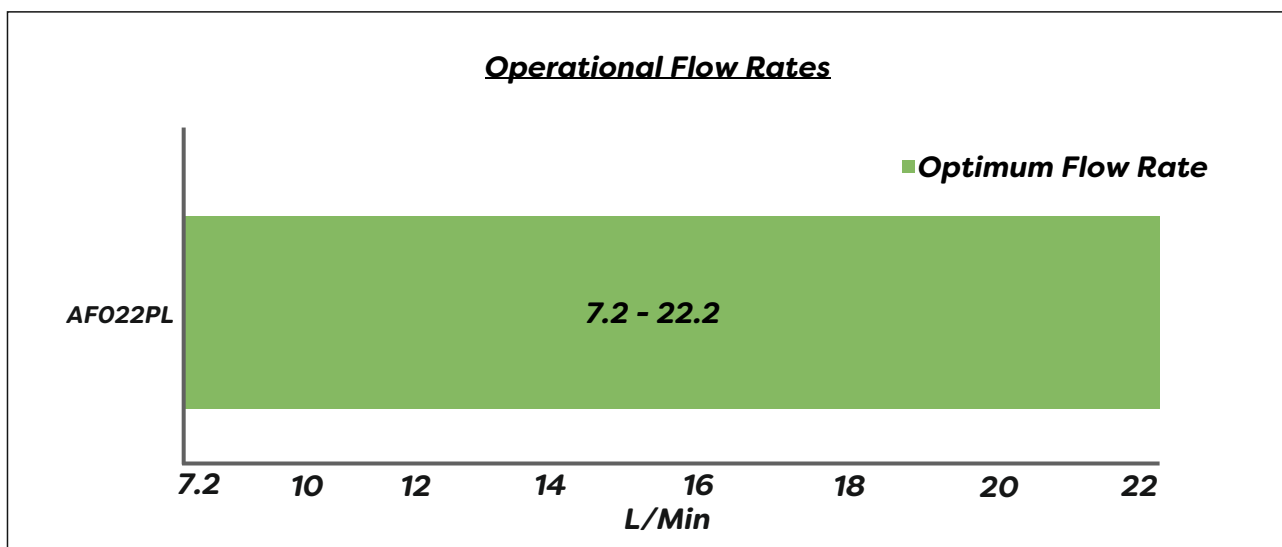

Dimensions

