



Introduction

The ActivFlo commercial range of water conditioners offer maximum protection for fluid systems and their components against the buildup of limescale. Featuring ActivFlo's unique patented alloy coil, the unit uses a catalytic method of water treatment to change the calcium and bicarbonate ions to precipitate from the water forming an insoluble microscopic calcium carbonate crystal called aragonite, the smooth surface of this crystal cannot adhere to surfaces.

Features and Benefits:


- **No power supply required**
- **Life expectancy in excess of 20 years**
- **Designed for commercial fluid systems**
- ***15 year warranty**
- **Fit and forget installation**
- **Stainless steel housing**
- **BSP threaded connection**
- **Helps to improve the efficiency of heating systems**

Product Range


Code	Description
AF0114	1 ¼" Male BSP ActivFlo Water Conditioner
AF0112	1 ½" Male BSP ActivFlo Water Conditioner
AF002	2" Male BSP ActivFlo Water Conditioner
AF0025	2 ½" Male BSP ActivFlo Water Conditioner

Technical Specification

Maximum Operating Pressure	16 Bar
Maximum Operating Temperature	99°C
Inlet Connection Size	Male BSP

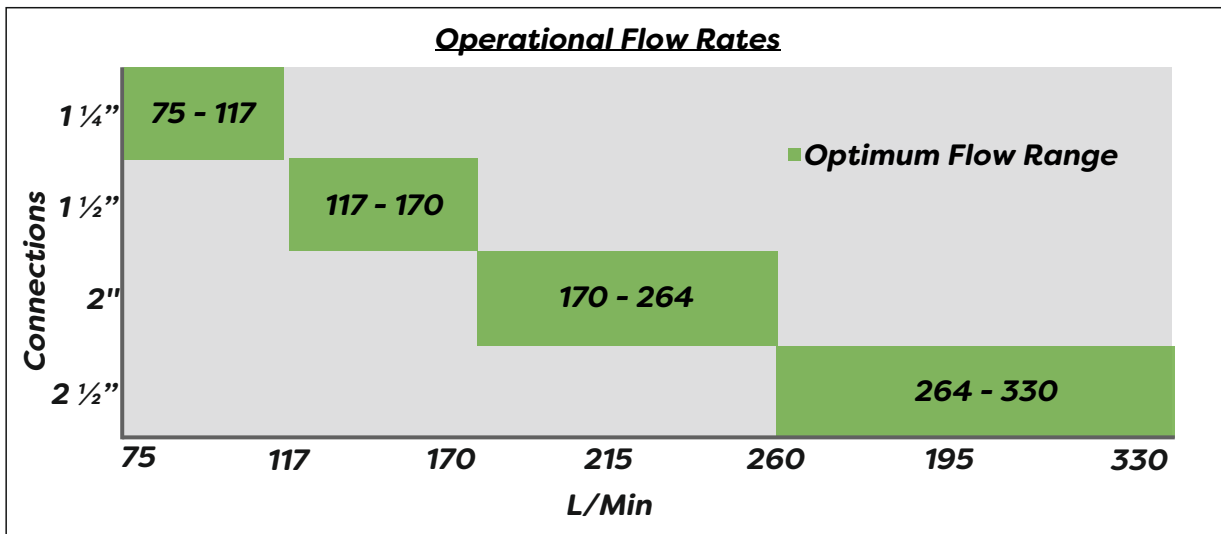

Dimensions

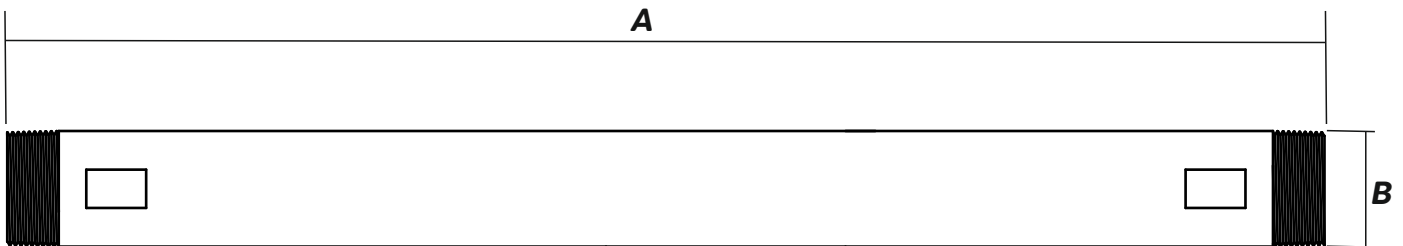

Part Code	Dimension A	Dimension B
AF0114	550mm	1 1/4"
AF0112	550mm	1 1/2"
AF002	550mm	2"
AF0025	550mm	2 1/2"