



Introduction

The ActivFlo commercial range of water conditioners offer maximum protection for fluid systems and their components against the buildup of limescale. Featuring ActivFlo's unique patented alloy coil, the unit uses a catalytic method of water treatment to change the calcium and bicarbonate ions to precipitate from the water forming an insoluble microscopic calcium carbonate crystal called aragonite, the smooth surface of this crystal cannot adhere to surfaces.

Features and Benefits:

- ***BMS Connection***
- ***Life expectancy in excess of 20 years***
- ***Designed for commercial fluid systems***
- ****15 year warranty***
- ***Fit and forget installation***
- ***Stainless steel housing***
- ***Power regulator for added performance***
- ***Helps to improve the efficiency of heating systems***


Product Range

Code	Description
AFP22PR	22mm ActivFlo Pro & Power Regulator
AFP34PR	¾ Male BSP ActivFlo Pro & Power Regulator
AFP10PR	1" Male BSP ActivFlo Pro & Power Regulator

Technical Specification

Maximum Operating Pressure	16 Bar
Maximum Operating Temperature	99°C
Inlet Connection Type	Male BSP / Compression

Dimensions

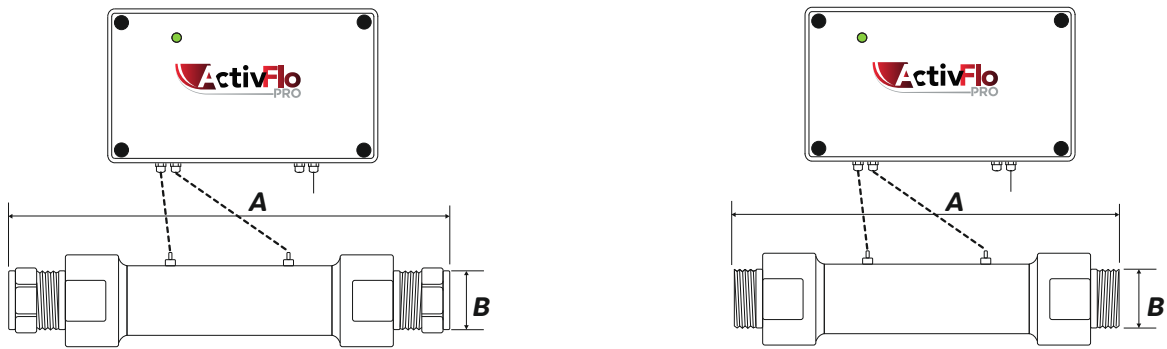

Part Code	Dimension A	Dimension B
AFP22PR	200mm	22mm

Part Code	Dimension A	Dimension B
AFP34PR	200mm	3/4" Male BSP
AFP10PR	305mm	1" Male BSP

