



Introduction

The ActivFlo commercial range of water conditioners offer maximum protection for fluid systems and their components against the buildup of limescale. Featuring ActivFlo's unique patented alloy coil, the unit uses a catalytic method of water treatment to change the calcium and bicarbonate ions to precipitate from the water forming an insoluble microscopic calcium carbonate crystal called aragonite, the smooth surface of this crystal cannot adhere to surfaces.

Features and Benefits:


- **BMS Connection**
- **Life expectancy in excess of 20 years**
- **Designed for commercial fluid systems**
- ***15 year warranty**
- **Fit and forget installation**
- **Stainless steel housing**
- **Power regulator for added performance**
- **Helps to improve the efficiency of heating systems**

Product Range


| Code | Description |
|-----------------|---|
| AFR14PR | 1 ¼" Male BSP ActivFlo Pro & Power Regulator |
| AFP112PR | 1 ½" Male BSP ActivFlo Pro & Power Regulator |
| AFP20PR | 2" Male BSP ActivFlo Pro & Power Regulator |

Technical Specification

| | |
|-------------------------------|----------|
| Maximum Operating Pressure | 16 Bar |
| Maximum Operating Temperature | 99°C |
| Inlet Connection Size | Male BSP |

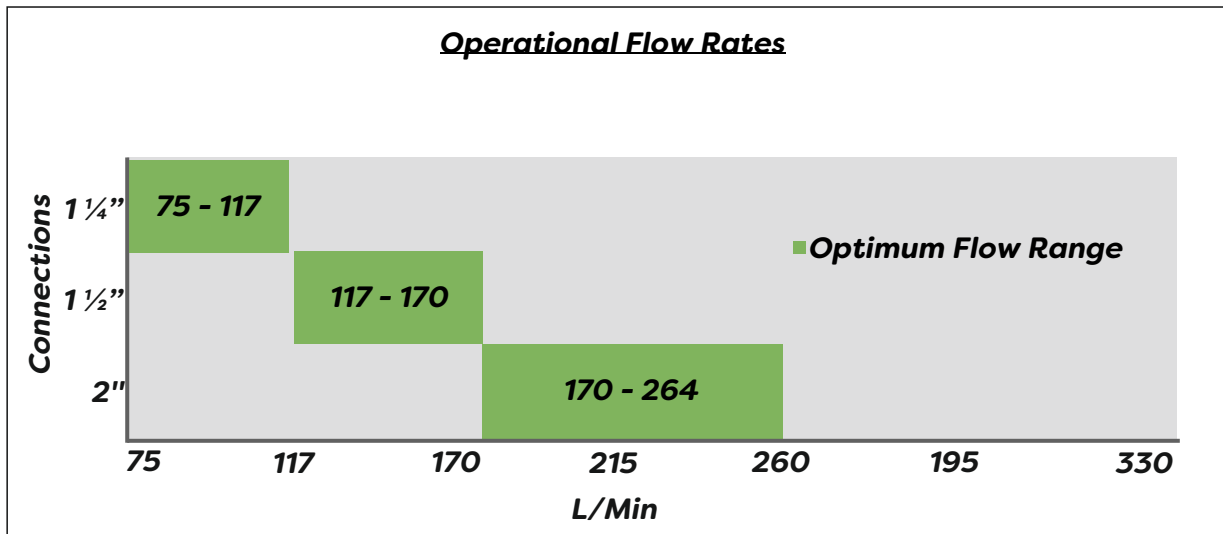

Dimensions

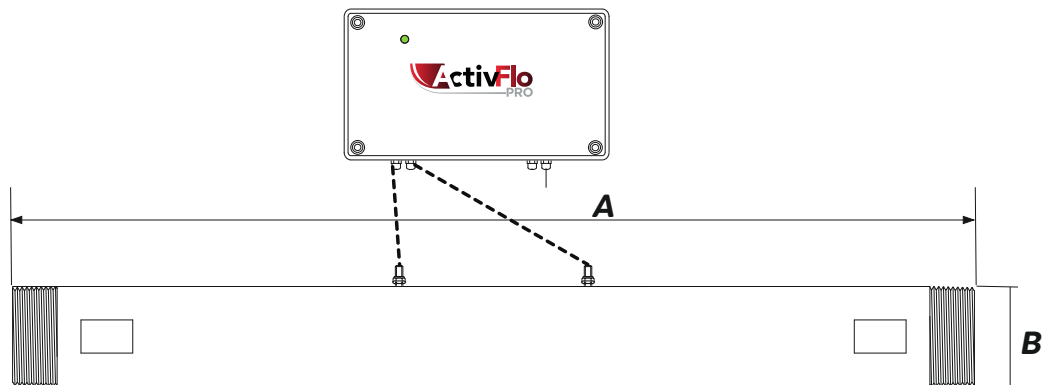

| Part Code | Dimension A | Dimension B |
|-----------|-------------|-----------------|
| AFR14PR | 550mm | 1 1/4" Male BSP |
| AFP112PR | 550mm | 1 1/2" Male BSP |
| AFP20PR | 550mm | 2" Male BSP |