



Introduction

The ActivFlo pro commercial range of water conditioners offer maximum protection for fluid systems and their components against the buildup of limescale. Featuring ActivFlo's unique patented alloy coil, the unit uses a catalytic method of water treatment to change the calcium and bicarbonate ions to precipitate from the water forming an insoluble microscopic calcium carbonate crystal called aragonite, the smooth surface of this crystal cannot adhere to surfaces.

Features and Benefits:

- **BMS Connection**
 - **Life expectancy in excess of 20 years**
 - **Designed for commercial fluid systems**
 - ***15 year warranty**
- **Fit and forget installation**
 - **Stainless steel housing**
 - **Power regulator for added performance**
 - **Helps to improve the efficiency of heating systems**


Product Range

Code	Description
AFP212FPR	2½" Flanged ActivFlo Pro & Power Regulator
AFP30FPR	3" Flanged ActivFlo Pro & Power Regulator
AFP40FPR	4" Flanged ActivFlo Pro & Power Regulator
AFP50FPR	5" Flanged ActivFlo Pro & Power Regulator
AFP60FPR	6" Flanged ActivFlo Pro & Power Regulator

Technical Specification

Maximum Operating Pressure	16 Bar
Maximum Operating Temperature	99°C

Dimensions

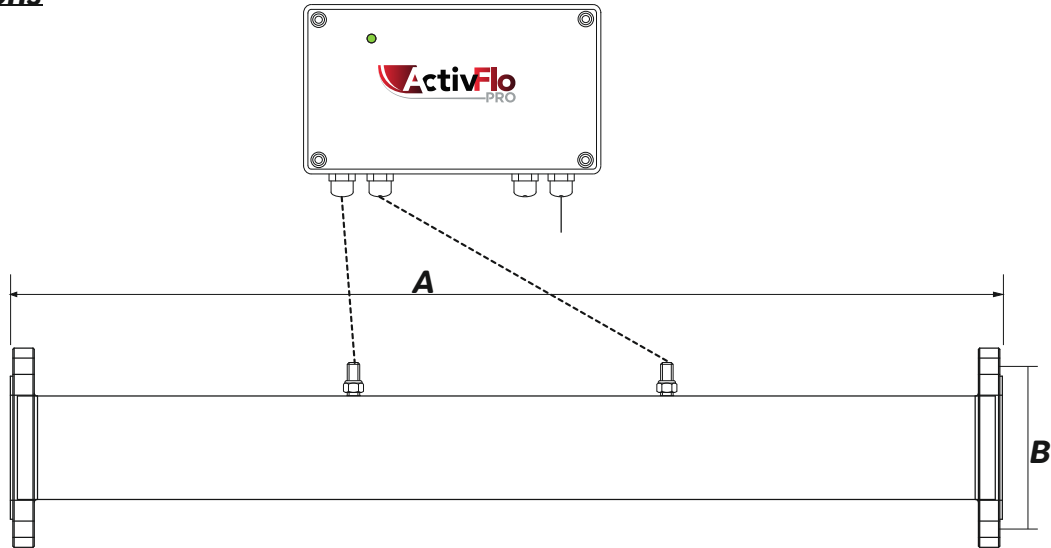

Part Code	Dimension A	Dimension B
AFP212FPR	850mm	2½" Flanged
AFP30FPR	850mm	3" Flanged
AFP40FPR	850mm	4" Flanged
AFP50FPR	850mm	5" Flanged
AFP60FPR	850mm	6" Flanged

