



# Introduction

The ActivFlo commercial range of water conditioners offer maximum protection for fluid systems and their components against the buildup of limescale. Featuring ActivFlo's unique patented alloy coil, the unit uses a catalytic method of water treatment to change the calcium and bicarbonate ions to precipitate from the water forming an insoluble microscopic calcium carbonate crystal called aragonite, the smooth surface of this crystal cannot adhere to surfaces.

### Features and Benefits:

- No power supply required
- Life expectancy in excess of 20 years
- Designed for commercial fluid systems
- \*15 year warranty

- Fit and forget installation
- Stainless steel housing
- Flanged connection
- Helps to improve the efficiency of heating systems


#### Product Range

Code	Description
AF003	3" Flanged Activflo Water Conditioner
AF004	4" Flanged Activflo Water Conditioner
AF005	5" Flanged Activflo Water Conditioner
AF006	6" Flanged Activflo Water Conditioner




# **Technical Specification**

Maximum Operating Pressure	16 Bar
Maximum Operating Temperature	99°C
Inlet Connection Type	Flanged

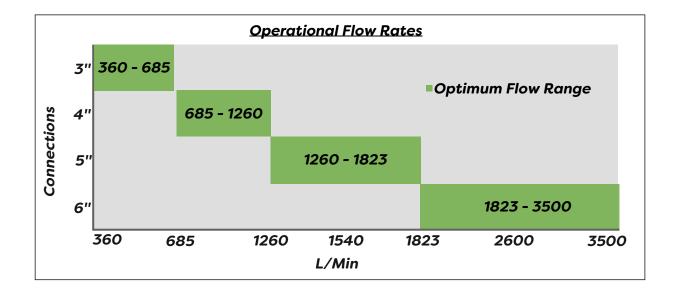

# **Dimensions**

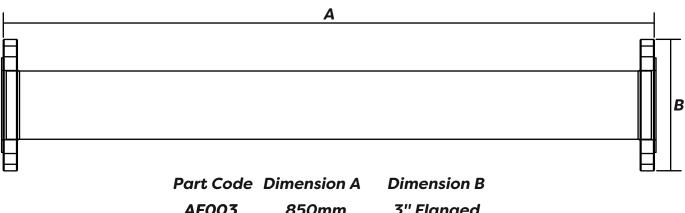

850mm	3" Flanged
850mm	4" Flanged
850mm	5" Flanged
850mm	6" Flanged
	850mm 850mm