

## Thermostatic Mixing Valves

### Introduction

The Intamix Pro range is designed for use in applications where a high volume of water is required at the outlet, such as shower blocks and centralized mixing. Providing a high volume of water at a stable temperature, the Intamix Pro reflects the quality of the Intatec range of washroom solutions.



- Thermostatic protection
- Tamper proof head
- Single piece thermostatic cartridge construction
- High flow rate, low pressure drops
- Adjustable outlet temperature
- Temperature stability  $\pm 2^{\circ}\text{C}$


### Product Range

Description	Code
intamix pro 1/2" with screwed iron MxMxM complete with integral check valves/filters	60001CP
intamix pro 3/4" with screwed iron MxMxM complete with integral check valves/filters	60003CP
intamix pro 1" with screwed iron MxMxM complete with integral check valves/filters	60004CP
intamix pro 1 1/4" with screwed iron MxMxM complete with integral check valves/filters	60005CP
intamix pro 1 1/2" with screwed iron MxMxM	60006CP
intamix pro 2" with screwed iron MxMxM	60023CP

## Thermostatic Mixing Valves

### Technical Specification

Max Inlet Pressure	10 Bar (static)
Min Inlet Pressure (dynamic)	0.2 Bar
Max Inlet Temperature	90°C
Max Inlet Pressure Differential	2:1
Outlet Temperature Adjustment	30°C - 65°C

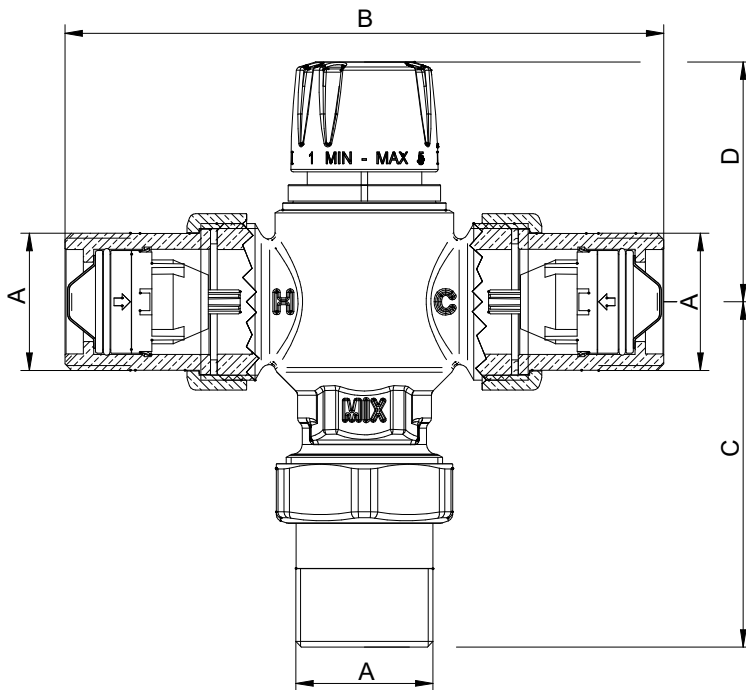

Code	A	B	C	D
60001CP	1/2"	108	67	55
60003CP	3/4"	118	72	55
60004CP	1"	165	96	79
60005CP	1 1/4"	183	105	79
60006CP	1 1/2"	217	125.5	100
60023CP	2"	238	138.5	100

